



VISICOMINDONESIA.COM

INDUSTRIAL
COMMERCIAL
PUBLIC SPACE
RESIDENTIAL



VISICOM

UNTUK DUNIA YANG LEBIH TERANG

Katalog produk resmi Visicom.


Spesifikasi pada katalog menjadi referensi awal.

Hubungi tim marketing untuk konsultasi dan konfirmasi produk.

VISICOMINDONESIA.COM

P R O D U C T C A T A L O G U E

INDUSTRIAL | COMMERCIAL | PUBLIC SPACE | RESIDENTIAL

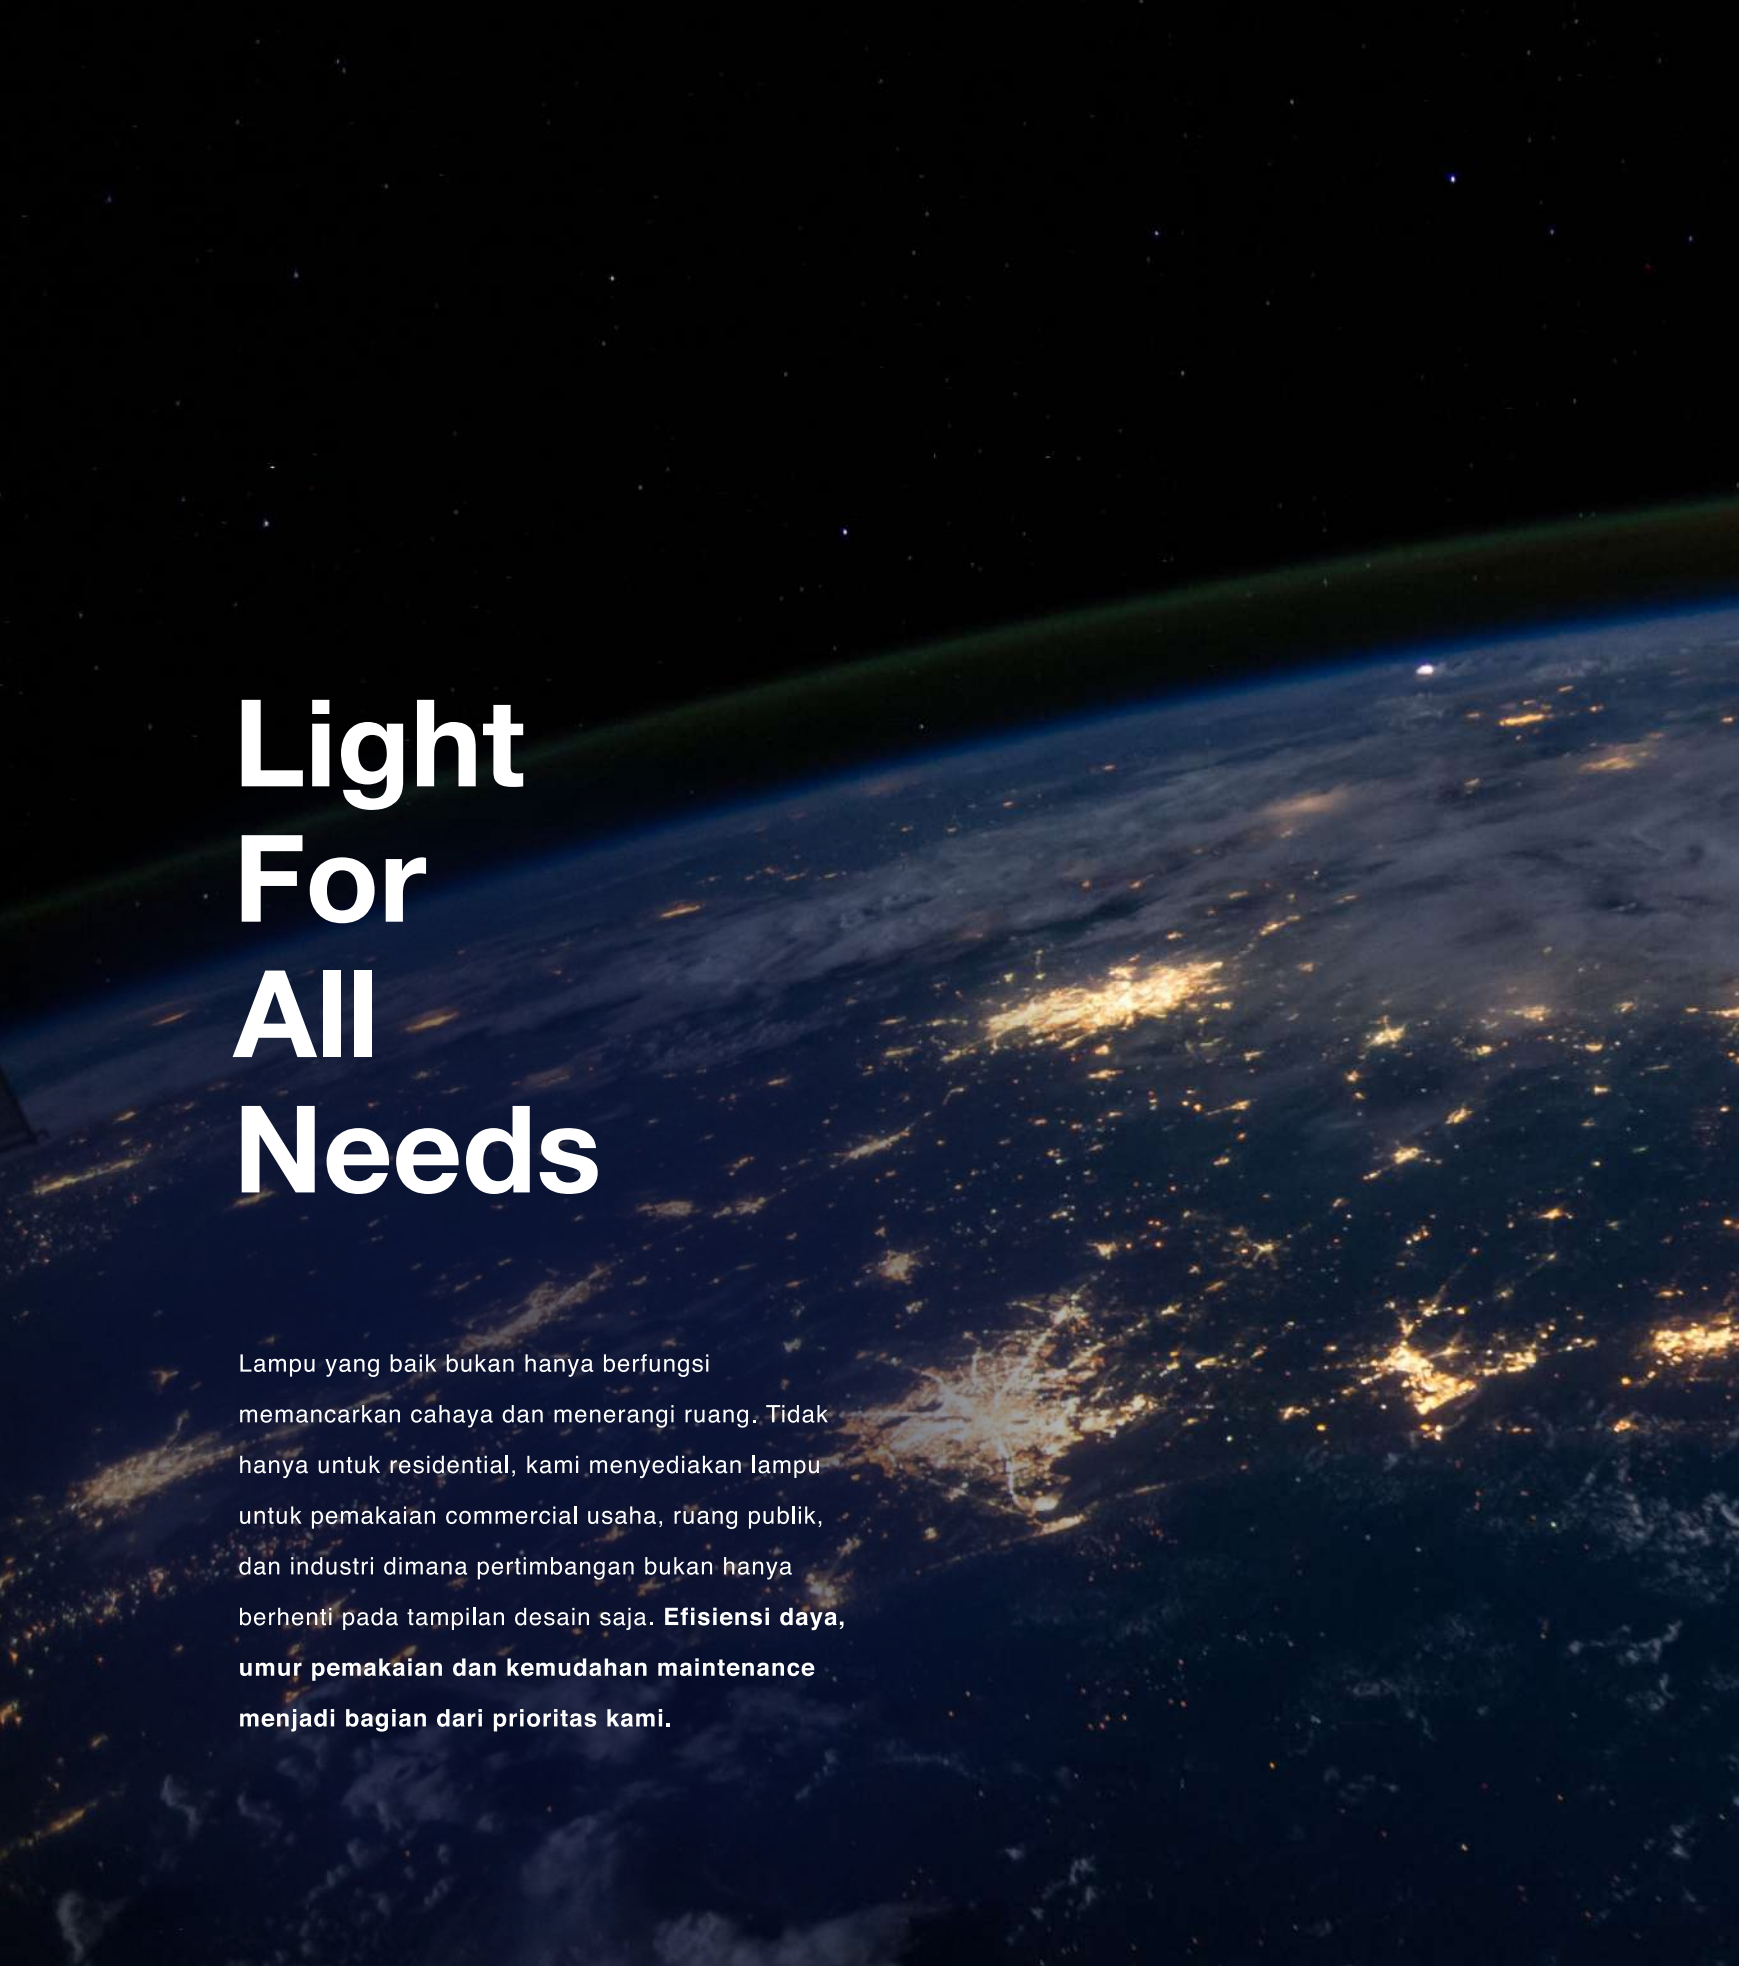

Light For All Needs

Lampu yang baik bukan hanya berfungsi memancarkan cahaya dan menerangi ruang. Tidak hanya untuk residential, kami menyediakan lampu untuk pemakaian commercial usaha, ruang publik, dan industri dimana pertimbangan bukan hanya berhenti pada tampilan desain saja. **Efisiensi daya, umur pemakaian dan kemudahan maintenance menjadi bagian dari prioritas kami.**




VISICOM
UNTUK DUNIA YANG LEBIH TERANG

LED EFFICIENT
ECONOMIC

Efficient

Penggunaan lampu LED untuk keperluan usaha, infrastruktur atau kebutuhan lain dapat meningkatkan efisiensi penggunaan listrik. Lampu LED memberikan kekuatan cahaya yang sama dengan lampu biasa dengan pemakaian energi yang lebih rendah.

Low Maintenance

Lampu LED tidak membutuhkan perawatan, penerangan akan bekerja langsung setelah instalasi. Dengan umur pemakaian yang panjang, tidak diperlukan lagi penggantian lampu dalam jangka pendek.

Durable

Dengan daya tahan dan umur yang jauh lebih lama, lampu-lampu LED Visicom mengurangi pemborosan yang tidak diperlukan dalam penerangan. Bukan hanya kualitas driver dan lampu saja, bentuk desain fitting dan kualitas bahan yang baik juga terbukti.



Our Profile

Berawal dari UD. Terang Abadi yang berdiri 1986 di Surabaya dan bergerak dibidang alat listrik. Seiring dengan berkembangnya perusahaan, maka pada tahun 1998 perusahaan berubah bentuk menjadi CV Terang Abadi. Di akhir tahun 2008 menjadi sebuah PT Terang Abadi Raya.

Mulai tahun 2012 kami memperkenalkan produk lampu LED (Light Emitting Diode) untuk dapat mengganti lampu – lampu LHE, SON, Metal Halide, dan lain-lain dimana LED jauh lebih hemat dan lebih efisien, lebih tahan lama, ramah lingkungan, serta desain yang menarik dan sustainable sehingga konsep GREEN dapat diciptakan untuk merealisasikan tujuan dunia terhadap penghematan energi.

Kami memiliki berbagai jenis lampu LHE, lampu LED menurut fungsi dan modelnya, dan memiliki laboratorium pengujian yang lengkap dengan standarisasi yang memenuhi standart SNI serta ISO 9001:2008 untuk kualitas manajemen mutu.

Pada saat ini, PT. Terang Abadi Raya selain menyediakan berbagai jenis lampu, kami juga melayani beberapa proyek seperti pergudangan, pabrik, jalan raya/tol, perumahan, tempat tinggal, pusat perbelanjaan dan lainnya. Selain itu, kami juga menyediakan berbagai macam produk untuk toko kelontong seperti gunting, paper clip, senter, kartu remi, raket nyamuk, dan sebagainya.





COMPANY BRAND

PT. Terang Abadi Raya

Visicom Lampu LED & Kabel Listrik



Visi

Bertujuan menjadikan Visicom merek yang terpercaya dalam bidang perlampuan maupun kabel listrik.

Misi

Menghadirkan produk-produk yang inovatif dan berkualitas dunia, serta pelayanan yang baik demi tercapainya kepuasan pelanggan.

LED EFFICIENT
ECONOMIC

Facts On Visicom's Dedicated Led Products

300% lebih efisien dari lampu neon.

1000% lebih efisien dari lampu pijar.



70-80% lebih hemat dari lampu
biasa / lampu tradisional.

Life Time 25.000 - 50.000 jam.

Tahan getaran, guncangan, dan
mengurangi beban pendinginan
gedung.

Tidak panas, tidak ada UV, tidak
menggunakan gas merkuri atau
gas beracun lainnya.

Lampu biasa 1W = 30 - 50 lumen,
lampu LED 1W = 90 - 160 lumen.

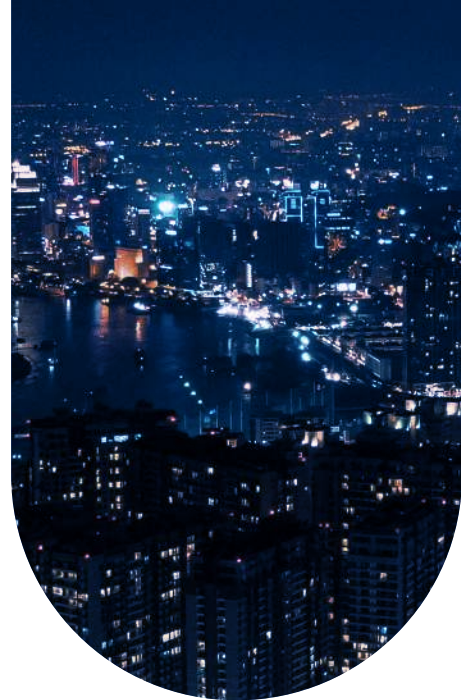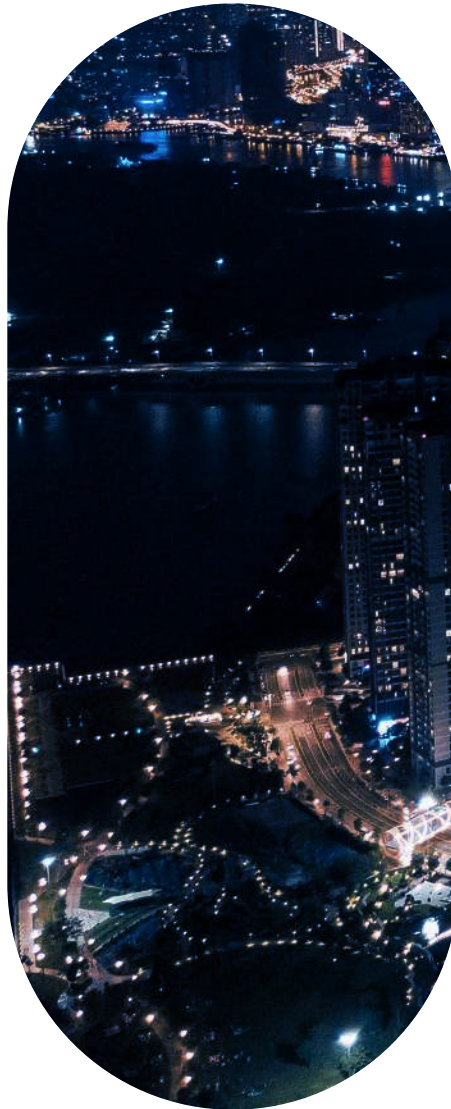



SAFETY APPROVAL IP20 | IP65 | CE

Suitable For

Public Space

Penerangan area umum seperti garden/ Open space/ jalan raya/ parking area yang membutuhkan daya tahan tinggi.

Commercial

Penerangan untuk office, showroom, retails, hospitals, shopping mall, dan supermarket.

Industrial

Pabrik/ Gudang dan fasilitas raksasa yang membutuhkan daya besar, bahan kokoh.

Residential

Design yang sesuai untuk penerangan rumah,

Our Product Certification





RELIABLE
EFFICIENT

VISICOM LED



LED Bulb

3W | 5W | 7W | 9W
12W | 15W | 19W | 27W

Voltage
AC 100 - 240V 50-60HZ | E27

Beam Angle	270°
CRI	> 80
IP Rate	IP 20
Life Time	30,000 Hours
Fixture Material	Aluminium
Power Factor	0,5
Lumen	120 Lm/watt
Chip Color Temperature	= 3000k / 4000k / 6500k

copyright ©2017 Visicom Indonesia.
Catalog Book Design. Every photos are copyright of Visicom.
Product showcased in the book is the real product.
Do not emulate, reproduce, or replicate part of or the whole book
and its content without prior permission from Visicom.



LED Candle C 38

4W

Voltage	AC 220 - 240V 50-60HZ E14
Color Temperature	3000K
Beam Angle	180°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	Ceramic Glass
Size	98mm ø37mm
Lumen	400 Lumen



LED R63 Bulb

8W

Voltage	AC 110 - 240V 50-60HZ E27
Color Temperature	3000K / 6400K
Beam Angle	80° - 100°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	PC Aluminium
Size	103mm ø63mm
Lumen	660 Lumen



LED PL

9W | 11W

Voltage	AC 170 - 240V 50-60HZ G24
Color Temperature	3000K / 4000K / 6400K
Beam Angle	180°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	PC Acrylic
Size	9W = 128mm ø29mm 11W = 140mm ø29mm
Lumen	9W = 750 Lumen 11W = 900 Lumen

LED

EFFICIENT
ECONOMIC



**LED BULB
FILAMENT**

2W | 4W | 6W | 8W

Voltage	AC 100-240V 50-60 Hz
Color Temperature	3000K
Beam Angle	200°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	Glass
Lumen	100 Lm/Watt

FITTING

2W
4W & 6W
8W

E27

2 Filament
4 Filament
6 Filament



LED RECHARGEABLE
LAMPS SUPER BATTERY

12W | 18W | 23W

Voltage	AC 100-240V 50/60 Hz / DC		Switch	Touch Function	
Fitting	E27		Protection Function	With Overcharge Function	
Color Temperature	6500K			Without Over-discharge Function	
CRI	> 80		Working Time	AC Function	: Long time
Lumen	12W	: 1200 Lm		DC Function	: 2 Hours
	18W	: 1800 Lm	EMC	Yes	
	23W	: 2300 Lm	Free Fitting DC		
Battery	12W	: 1 Pcs 3,7V / 1800mAh			
	18W	: 1 Pcs 3,7V / 2000mAh			
	23W	: 1 Pcs 3,7V / 2000mAh			



LED BULB CAPSULE

10W | 15W | 20W | 30W | 40W | 50W

Voltage	AC 100-240V 50-60 Hz
Color Temperature	6500K
Beam Angle	270°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	PC
Lumen	120 Lm/Watt



LED UFO

50W

Voltage	AC 170-240V 50-60Hz
Color Temperature	3000K / 6500K
Beam Angle	200°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	PC
Lumen	5000 Lm



LED
EFFICIENT
ECONOMIC



LED BULB BOWLING

80W

Voltage	AC 180-240V
Color Temperature	6500K
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	PC
Lumen	8000 Lm

LED BULB
JUMBO HIGHBAY
(V1) YT

120W | 160W

Input Voltage 100-240V
Color Temperature 6500K
Beam Angle 120°
CRI > 80
PF > 0.9
Life Time 20000 Hours

Soitable Instalation Height 120W : 10 - 12M
160W : 13 - 16M
Size 120W : 230mm x 306mm
160W : 280mm x 350mm
Cap E40

Lumen 120W : 12000 Lm
160W : 16000 Lm



copyright ©2017 Visicom Indonesia.
Catalog Book Design. Every photos are copyright of Visicom.
Product showcased in the book is the real product.
Do not emulate, reproduce, or replicate part of or the whole book
and its content without prior permission from Visicom.

LED

EFFICIENT
ECONOMIC



LED DOWNLIGHT IB WE

6W / 9W / 12W / 18W

Color Temperature	6500K / 4000K / 3000K		
Voltage	AC 100-240V 50/60 Hz		
Lumen	6W	: 480 Lm	
	9W	: 720 Lm	
	12W	: 960 Lm	
	18W	: 1440 Lm	
CRI	> 80		
PF	> 0.5		
Size	6W	: 120mm * 24mm	Φ 108mm
	9W	: 150mm * 24mm	Φ 135mm
	12W	: 170mm * 24mm	Φ 158mm
	18W	: 225 mm * 24mm	Φ 206mm
Lifetime	25000 Hrs		
Non Dimmable			

LED DOWNLIGHT

SPEAKER MODEL 3,5W / 10W / 13W / 18W
BULB MODEL 5W / 8W / 12W

Voltage	AC 100-240V 50-60 Hz		
Color Temperature	3000K/ 6000K		
Lumen	100 Lm / W		
Beam Angle	Bulb Model	: 100°	
	Speaker Model	: 120°	
CRI	> 80		
IP Rate	IP 20		
Life Time	30000 Hours		
Fixture Material	Die Cast Aluminium		
Operating Temp.	(-30C) - (+45C)		

SPEAKER MODEL

Size		
3"	: 3,5 w	ø 106 x 66
4"	: 10 w	ø 145 x 75
6"	: 13 w	ø 170 x 83
8"	: 18 w	ø 225 x 93

BULB MODEL

Size		
2,5"	: 5 w	ø 96 x 64
4"	: 8 w	ø 120 x 78
6"	: 12 w	ø 190 x 93,5



SPEAKER MODEL



BULB MODEL



LED DOWNLIGHT OB WE VISICOM

5W | 12W

Voltage	AC 100 - 240V 50/60HZ
Color Temperature	6500K / 4000K / 3000K
Lumen	5W : 480 Lm
	12W : 960 Lm
CRI	> 80
PF	> 0,5
Life Time	25000 Hours
Size	5W = 120mm ø28mm
	12W = 170mm ø28mm

Non Dimmable



LED DOWNLIGHT HB VISICOM SPOT 3,5"

5W | 7W

Voltage	AC 100 - 240V 50-60HZ
Color Temperature	3000K / 6500K
Lumen	3000K 5W = 350 Lm
	6500K 5W = 400 Lm
	3000K 7W = 500 Lm
	6500K 7W = 560 Lm
PF	> 0,5
Size	90x42mm

Non Dimmable

copyright ©2017 Visicom Indonesia.
Catalog Book Design. Every photos are copyright of Visicom.
Product showcased in the book is the real product.
Do not emulate, reproduce, or replicate part of or the whole book
and its content without prior permission from Visicom.



PAR 38

15W

Voltage	AC 110 - 240V 50-60HZ E27
Color Temperature	3000K
Beam Angle	38°
CRI	> 80
IP Rate	IP 65
Life Time	25000 Hours
Fixture Material	Die Cast Aluminium
Size	ø120 x 138
Lumen	90 Lm/watt

LED MR 16

3W | 5W | 7W

Voltage	AC 165 - 250V
Color Temperature	3000K / 4000K / 6500K
Beam Angle	36°
CRI	> 80
PF	> 0.5
IP Rate	IP 44
Life Time	25000 Hours
Size	ø50 x 49 mm
Lumen	100 Lm/Watt





LED EFFICIENT
ECONOMIC

LED PANEL

40W

Voltage	AC 220 - 240V 50-60HZ	IP Rate	IP 20
Color Temperature	6000K	Life Time	25000 Hours
Beam Angle	200°	Fixture Material	Aluminium
CRI	80 Ra	Size	600 x 600 + 300 x 1200
Lumen	4000 Lm	Operating Temp.	(-30C) - (+45C)

2 Lamps | Front View



2 Lamps | Rear View



1 Lamp | Front View



1 Lamp | Rear View




KAP TRIPOOF

1 Lamp / 2 Lamps

IP Rate	IP 65	ABS
Light Transmission	90%	
Stent Cover	PS	
Transparent Cover		
Waterproof		
Anti Corrosion		

Size (P x L x T)	1 Lamp	: 1200 x 10,7 x 7,5 cm
	2 Lamps	: 1200 x 7,8 x 8 cm

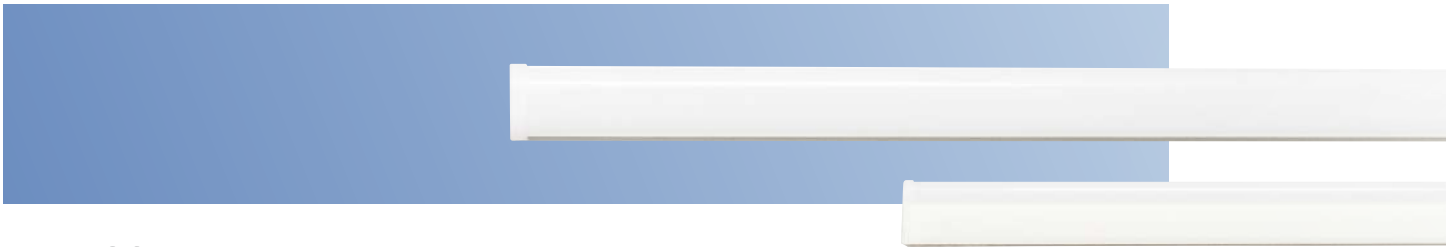

LED VSC TL T5

9W | 18W
VISICOM SMART: 5W

Voltage	AC 110-240V 50-60Hz
Color Temperature	3000K / 4000K / 6400K
Beam Angle	120°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	PC
Length	5W = 30 Cm 9W = 60 Cm 18W = 120 Cm
Lumen	120 Lm/Watt

LED TUBE VSC
T8 LED SUPER

10W | 16W | 23W | 25W

Voltage	10W	AC 100-240V 50-60 Hz
	20W	AC140-260V 50-60 Hz
	23W	AC100-265W 50Hz
	25W	AC170-240V 50Hz1
Color Temperature	3000K / 4000K / 6500K	
Beam Angle	200°	
CRI	> 80	
IP Rate	IP 20	
Life Time	25000 Hours	
Fixture Material	PC	
Length	10W	60 cm
	20W, 25W	120cm
	23W	150 Cm
	10W & 23W = 100 Lm/Watt	
Lumen	16W & 25W = 120 Lm/Watt	

TL T8 VSC SMART
(GLASS)

18W (120cm)

Voltage	AC165-265V 50-60Hz
Color Temperature	6500K
Beam Angle	200°
CRI	> 80
IP Rate	IP 20
Life Time	25000 Hours
Fixture Material	GLASS
Lumen	100 Lm/Watt



copyright ©2017 Visicom Indonesia.
Catalog Book Design. Every photos are copyright of Visicom.
Product showcased in the book is the real product.
Do not emulate, reproduce, or replicate part of or the whole book
and its content without prior permission from Visicom.

LED

EFFICIENT
ECONOMIC





FLOOD LIGHT VISICOM SMART

10W / 20W / 30W / 50W /
100W / 150W / 200W

Voltage	AC 200-240V 50-60 Hz
Color Temperature	3000K / 6500K
Beam Angle	120°
CRI	>80
IP Rate	IP 65
Life Time	30,000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp.	(-30C) - (+45C)
Lumen	120 Lm/Watt



LED FLOODLIGHT SM VISICOM

10W / 20W / 30W / 50W /
100W / 150W / 200W

Voltage	AC 100 - 240V
Color Temperature	3000K / 6500K
Beam Angle	100°
CRI	> 70
IP Rate	IP 66
PF	10 - 20W : > 0,5 30 - 200W: > 0,9

Life Time 20000 Hours

Non Dimmable

Switch IC Driver

Lumen	10W	: 900 Lm
	20W	: 1800 Lm
	30W	: 3600 Lm
	50W	: 6000 Lm
	100W	: 12000 Lm
	150W	: 18000 Lm
	200W	: 24000 Lm
Size	10W	: 104 x 92 x 21 mm
	20W	: 126,5 x 114 x 24,5 mm
	30W	: 164,5 x 153 x 34 mm
	50W	: 183 x 169 x 34 mm
	100W	: 253,5 x 242,5 x 40 mm
	150W	: 328,5 x 295 x 43 mm
	200W	: 402,5 x 349,5 x 44 mm



**LED TUNNEL LIGHT
EKD-TL-S**

70W

Voltage	AC 90 - 260V 50-60HZ
Color Temperature	3000K/ 6500K
Beam Angle	120°
CRI	> 80
IP Rate	IP 65
Life Time	25000 Hours
Fixture Material	Die Cast Aluminium
Weight	6,78 kg
Operating Temp.	(-30°C) - (+45°C)
LED Chip	Bridgelux (USA) / setara
Driver	Meanwell / setara
Lumen	8400 Lm

SPOT MODEL

Voltage	AC 100-260V 50-60Hz
Beam Angle	60°
Weight	6,96 kg

**LED TUNNEL LIGHT
EKD-TL-S**

2x70W | 140W

Voltage	AC 100 - 260V 50-60HZ
Color Temperature	3000K/ 6500K
Beam Angle	120°
CRI	> 80
IP Rate	IP 65
Life Time	25000 Hours
Fixture Material	Die Cast Aluminium
Weight	10,98 kg
Operating Temp.	(-30°C) - (+45°C)
LED Chip	Bridgelux (USA) / setara
Driver	Meanwell / setara
Lumen	16,800 Lm

SPOT MODEL

Voltage	AC 100-260V 50-60Hz
Beam Angle	60°
Weight	11 kg





LED FLOODLIGHT EKD-FL-S

70W

Voltage	AC 100-240V 50-60Hz
Color Temperature	3000K / 6500K
Beam Angle	120°
Operating Temp.	50°C
Weight	4,6 kg
Rated Output	70 W
Protection Class	IP 65
Lumen	8400 Lm



LED FLOODLIGHT EKD-FL-S

(2x70) 140W

Voltage	AC 100-240V 50-60Hz
Color Temperature	3000K / 6500K
Beam Angle	120°
Operating Temp.	50°C
Weight	8,12 kg
Rated Output	2 x 70 W
Protection Class	IP 65
Lumen	16,800 Lm



LED FLOODLIGHT EKD-FL-S

(4X70) 280W

Voltage	AC 100-240V 50-60Hz
Color Temperature	3000K / 6500K
Beam Angle	120°
CRI	>80
Weight	14,72 kg
Fixture Material	Die Cast Aluminium
Life Time	25000 Hours
Operating Temp.	(-30°C) - (+45°C)
IP Rate	IP 65
LED Chip	Bridgelux (USA) / setara
Driver	Meanwell / setara
Lumen	33,600 Lm



LED EKD ML-A (HIGH BAY)

50W | 80W | 120W

Voltage	AC 100-240V 50-60Hz	IP Rate	IP 44
Color Temperature	3000K / 6500K	Life Time	25000 Hours
Beam Angle	100°	Fixture Material	Aluminium Body
CRI	>80	Weight	50W = 2kg
Lumen	120 Lm/Watt		80W = 4kg
			120W = 4,12kg

frosted lens



clear lens



LED HIGHBAY EKD ML-Q

100W

Voltage	AC 220-240V 50/60 Hz
Color Temperature	6500K
Efikasi	> 100 Lm / W
CRI	> 80
PF	> 0.95
Weight	2 kg
Size	ø45cm H30cm
Lumen	10,000 Lm



LED MINING LIGHT EKD ML-U (UFO)


50W | 100W | 150W | 200W

Voltage	AC 100-240V 50-60 Hz
Color Temperature	6500K
Beam Angle	100° - 120°
CRI	> 80
IP Rate	IP 65
Life Time	50.000 Hours
Fixture Material	Alloy Body
Lumen	14,000 Lm

LED HIGHBAY U2

100W | 150W | 200W


Voltage	AC 100-240V 50-60 Hz / E40
Color Temperature	6500K
Beam Angle	60° / 90° / 120°
CRI	> 80
PF	> 0.90
IP Rate	IP 65
Life Time	50000 Hours
Fixture Material	Aluminium Body
Weight	2,18 kg
Size	ø280 x 166mm
Lumen	100W : 13500 Lm 150W : 20000 Lm 200W : 27000 Lm
Current	100W : 1A 150W : 1.5A 200W : 2A

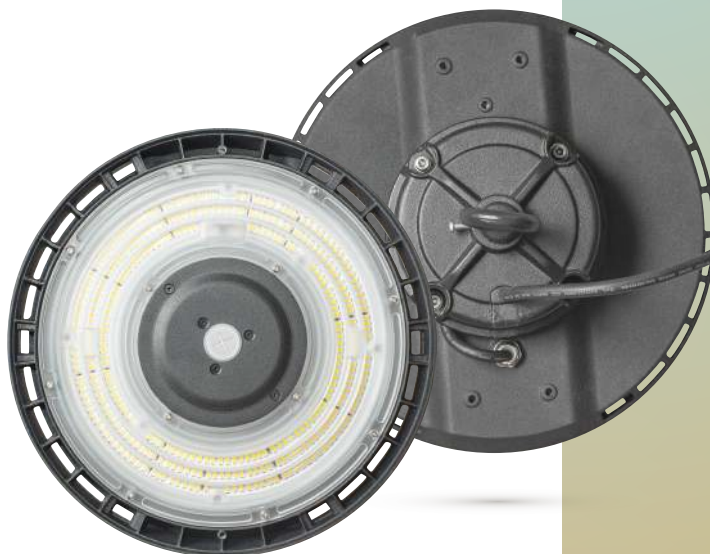

LED HIGHBAY U3

100W | 150W | 180W

Voltage	AC100-240V 50-60 Hz
Color Temperature	6500K
Beam Angle	60° / 90° / 120°
CRI	> 80
PF	> 0.90
IP Rate	IP 65
L/N-PE	4KV 6KV
Lifetime	25.000 Hours
Lumen	100W : 9000 Lm 150W : 13500 Lm 180W : 16200 Lm
Current	100W : 1A 150W : 1.5A
Size	100W : ø274 x 115mm 150W : ø274 x 115mm 180W : ø300 x 115mm
Weight	100W : 1,14 kg 150W : 1,25 kg 180W : 1,25 kg

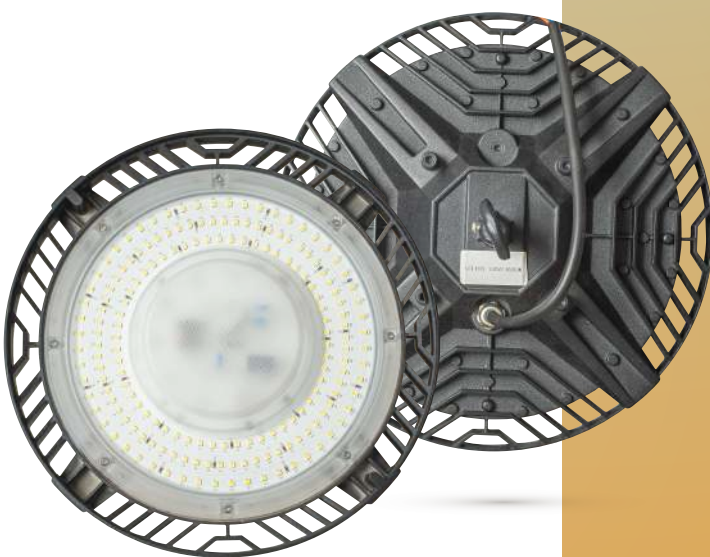



LED

EFFICIENT
ECONOMIC

copyright ©2017 Visicom Indonesia.
Catalog Book Design. Every photos are copyright of Visicom.
Product showcased in the book is the real product.
Do not emulate, reproduce, or replicate part of or the whole book
and its content without prior permission from Visicom.

Street Light



LED EKD RL - B

50W | 100W | 150W

Voltage	AC 85-277V
Color Temperature	3000K / 6500K
Beam Angle	120°
CRI	> 80
IP Rate	IP 65
Life Time	50,000 Hours
Operating temp	±40°C - ±60°C
Power Factor	0,9
Lumen	145 Lm/Watt



LED EKD-RL-S (MINI ROAD LIGHT)

15W | 25W

Voltage	AC 100 - 240V 50-60HZ
Color Temperature	3000K / 6500K
Beam Angle	120°
CRI	> 80
IP Rate	IP 65
Life Time	30000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp	(-30°C) - (+45°C)
LED Chip	Bridgelux (USA) / setara
Pole Diameter	15 W = 43 mm 25 W = 42 mm
Lumen	120 Lm/Watt

LED EKD-RL-A

30W

Voltage	AC 100 - 240V 50-60HZ DC 30 - 39 V
Color Temperature	3000K / 6000K
Beam Angle	100°
CRI	> 80
IP Rate	IP 65
Life Time	25000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp	±50°C
Weight	2,52 kg
Pole Diameter	58 mm
LED Chip	Bridgelux (USA) / setara
Lumen	3600 Lm



Street Light



LED STREET LIGHT VSC LSL

120W | 140W

Voltage	AC 100-240 / 277V 50-60 Hz
Color Temperature	4000K / 5000K / 5700K
CRI	> 70
IP Rate	IP 66
Life Time	50,000 Hours
Fixture Material	Die Cast Aluminium
Lumen	165 Lm/watt



LED EKD-RL (1 Mata)

30W | 40W | 50W | 60W

Voltage	AC 100-240V 50-60 Hz
Color Temperature	3000K / 6500K
Beam Angle	100°
CRI	> 80
IP Rate	IP 65
Life Time	50,000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp.	(-30°C) - (+45°C)
Weight	30 W = 4,40 kg 40 W = 5 kg 50 W = 5,96 kg 60 W = 5,96 kg
Pole Diameter	30 W = 58 mm 40 W = 60 mm 50 W = 60 mm 60 W = 60 mm
Chip	Bridgelux (USA) / setara
Lumen	120 Lm/Watt



LED EKD-RL-NB (2 Mata)

60W / 80W / 100W

Voltage	AC 100 - 240V 50 - 60Hz
Color Temperature	3000K / 6500K
Beam Angle	100°
CRI	> 80
IP Rate	IP 65
Life Time	50.000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp.	(-30°C) - (+45°C)
Weight	7 kg
Pole Diameter	60 mm
Chip	Bridgelux (USA) / setara
Lumen	120 Lm/Watt



LED EKD-RL-NB (3 Mata)

3x40W / 3x50W

Voltage	AC 100 - 240V 50 - 60Hz
Color Temperature	3000K / 6500K
Beam Angle	100°
CRI	> 80
IP Rate	IP 65
Life Time	50.000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp.	(-30°C) - (+45°C)
Weight	7,5 kg
Pole Diameter	60 mm
Chip	Bridgelux (USA) / setara
Lumen	120 Lm/Watt



LED STREETLIGHT SY (1 MATA)

30W / 50W

Voltage	AC 100 - 265V
PF	> 0.9
Lumen	3000 Lm / 5000 Lm
Beam Angle	120°
Life Time	25.000 Hours
Surge Protection	SKV
Isolated Driver	



LED STREETLIGHT SY (2 MATA)

100W

Voltage	AC 100 - 265V
PF	> 0.9
Lumen	10000 Lm
Beam Angle	120°
Life Time	25.000 Hours
Surge Protection	SKV
Isolated Driver	



LED EKD-RL-M

30W

Voltage	AC 100 - 260V 50-60Hz
Color Temperature	3000K / 6500K
Beam Angle	150°
Operating Temp.	±50°C
IP Rate	IP 65
Output Current	900mA
Weight	2,52 kg
Pole Diameter	45 mm
Life Time	50.000 Hours
Lumen	3600 Lm



LED EKD-RL-M

50W

Voltage	AC 100 - 260V 50-60Hz
Color Temperature	3000K / 6500K
Beam Angle	150°
Operating Temp.	±50°C
IP Rate	IP 65
Output Current	1500mA
Weight	3,94 kg
Pole Diameter	55 mm
Life Time	50.000 Hours
Lumen	6000 Lm

Street Light



LED EKD-RL-NS

60W / 90W

Voltage	AC 200 - 265V 50 - 60Hz
Color Temperature	3000K / 6500K
Arus Current	0.36A Max (60W) 0.72A Max (90W)
IP Rate	IP 65
PF	> 0.9
Lumen	120 Lm/Watt
Surge Protection	

Led	60W : 70 Led
	90W : 100 Led
Size	60W : 50 x 21 x 4 cm
	90W : 52 x 22 x 5 cm

Pole Diameter 6,5 cm

Isolated Driver

LED
EFFICIENT
ECONOMIC

copyright ©2017 Visicom Indonesia.
Catalog Book Design. Every photos are copyright of Visicom.
Product showcased in the book is the real product.
Do not emulate, reproduce, or replicate part of or the whole book
and its content without prior permission from Visicom.



LED EKD-RL-S

60W / 90W

Voltage	AC 100 - 240V 50 - 60Hz
Color Temperature	3000K / 6500K
Beam Angle	150°
CRI	> 80
IP Rate	IP 65
Life Time	50,000 Hours
Fixture Material	Die Cast Aluminium
Operating Temp.	(-20°C) - (+55°C)
Weight	60W = 4,92 kg 90W = 5,12 kg
Pole Diameter	58 mm
Chip	Bridgelux (USA) / setara
Lumen	120 Lm/Watt



ke Hall





VISICOM
UNTUK DUNIA YANG LEBIH TERANG

PT. TERANG ABADI RAYA

VISICOMINDONESIA.COM